

03079 Style Instruction

LIGHT (A Key) _____

MODE (B Key) _____




_____ (D Key) START

_____ (C Key) RESET

A. Features

- 10-digit LCD display. Displays hour, minute, second, month, day and week.
- Daily alarm and hourly chime.
- 12 / 24H format selectable. Auto calendar.
- Chronograph with LAP function (up to 59'59.99").
- Fast advance for time and alarm setting.
- Press B, C and D Keys for full LCD display. Press B, C and D Keys to return to Real Time Mode.
- A tone sounds when pressing the B Key.
- EL backlight.

B. Operational Manual

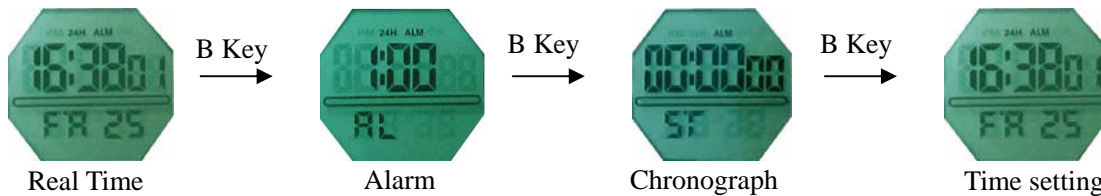

1. At any state, press A Key to activate EL backlight for 3s.
2. Real Time
 - To toggle 12 / 24H format, press D Key. "24H" will display when in 24H format. "PM" will display when in the PM hours of 12H format, and there will be no special display when in the AM hours of 12H format.
3. Daily Alarm
 - Turn On / Off Alarm and Chime
Press D Key to toggle the alarm. "ALM" displays when the alarm is active, and "CHI" when the hourly chime is active. When alarming, the "ALM" indicator will flash and auto stop after 20s.
 - Alarm setting: Press C Key to select "Hour" or "Minute" setting. Press D Key to adjust the selected flashing item.
4. Chronograph
 - The display range of the chronograph is 59 minutes, 59.99 seconds.
 - Press D Key to start / stop.
 - When stopped, press C Key to zero.
 - When running, press B Key to enter Real Time Display Mode.
 - When running, press C Key to split count (indicator "LAP" will display and "COL" will flash).
 - Press C Key again to exit split counting.
 - At split counting, press D Key to stop counting ("COL" will stop flashing).
 - Then press C Key to display all chronograph values. Press C Key again to zero.
 - In chronograph mode, a tone will sound when pressing the D Key.

5. Time Setting

- In Time Setting Mode, the seconds will flash. Press D Key to zero. Press C Key to select hour, minute, month, day and weekday settings.
- Press D Key to adjust the selected flashing item.
- Finally, press B Key to return to Real Time Mode.